



SAW Components

SAW Duplexer

for W-CDMA Band IV / CDMA 1x AWS Band

Series/type:	B7699
Ordering code:	B39212B7699P810
Date:	February 04, 2010
Version:	2.0




Data Sheet




Application

- Low-loss SAW duplexer for mobile telephone W-CDMA Band IV / CDMA 1x AWS systems
- Low insertion attenuation
- Low amplitude ripple
- Usable passband 45 MHz
- Fully matched with integrated matching network

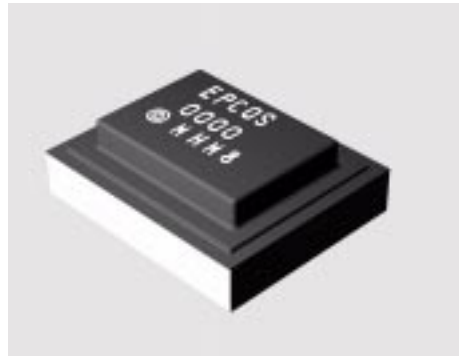


Features

- Package size 2.5 x 2.0 x 0.89 mm³
- RoHS compatible
- Approx. weight 0.035 g
- Package for Surface Mount Technology (SMT)
- Ni, gold-plated terminals
- Electrostatic Sensitive Device (ESD)
- Moisture Sensitive Level 3

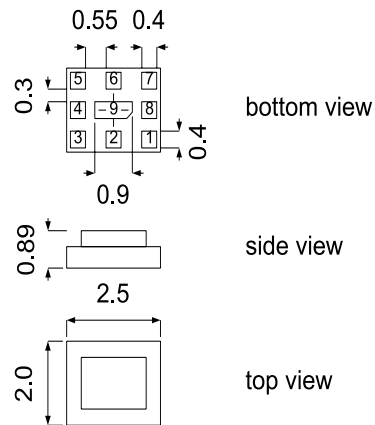

Pin configuration

- 1 RX Output
- 3 TX Input
- 6 Antenna
- 2, 4, 5 To be grounded
- 7, 8, 9 To be grounded

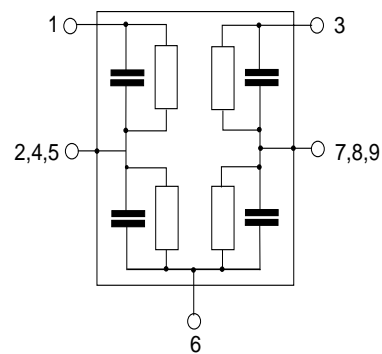



Data Sheet



Characteristics for W-CDMA Band 4

Temperature range for specification: T = -15 °C to +80 °C
 Antenna terminating impedance: Z_{ANT} = 50 Ω
 RX terminating impedance: Z_{RX} = 50 Ω
 TX terminating impedance: Z_{TX} = 50 Ω

Characterisitcs TX - ANT					min.	typ. @ 25 °C	max.	
Center frequency					f _C	1732.5		MHz
Maximum insertion attenuation					α _{WCDMA} ¹⁾			
@f _{carrier}	1712.4	...	1752.6	MHz		1.5	1.8	dB
@f _{carrier}	1712.4	...	1752.6	MHz		1.5	1.7 ²⁾	dB
Amplitude ripple (p-p)					Δα _{WCDMA} ¹⁾			
@f _{carrier}	1712.4	...	1752.6	MHz		0.4	1.0	dB
Error Vector Magnitude					EVM ³⁾			
	1712.4	...	1752.6	MHz		0.85	2.0	%
Input VSWR (TX port)								
	1710.0	...	1755.0	MHz		1.9	2.0	
Output VSWR (ANT port)								
	1710.0	...	1755.0	MHz		1.7	2.0	
Attenuation					α			
	0.3	...	1000.0	MHz	30	38		dB
	1310.0	...	1355.0	MHz	30	36		dB
	1574.0	...	1577.0	MHz	38	45		dB
@f _{carrier}	2112.4	...	2152.6	MHz	43	46		dB
	2400.0	...	2500.0	MHz	25	37		dB
	3420.0	...	3510.0	MHz	20	25		dB
	5130.0	...	5265.0	MHz	7	12		dB

1) Attenuation of WCDMA signal ("Powertransferfunction"). Please refer to annotation on page (9).

2) Maximum insertion attenuation at room temperature T= +25 °C.

3) Error Vector Magnitude (EVM) based on definition given in 3GPP TS 25.141.



SAW Components

B7699

SAW Duplexer

1732.5/2132.5 MHz

Data Sheet



Characteristics for W-CDMA Band 4

Temperature range for specification: T = -15 °C to +80 °C
 Antenna terminating impedance: Z_{ANT} = 50 Ω
 RX terminating impedance: Z_{RX} = 50 Ω
 TX terminating impedance: Z_{TX} = 50 Ω

Characterisitcs ANT - RX					min.	typ. @ 25 °C	max.	
Center frequency					f _C	2132.5		MHz
Maximum insertion attenuation					α _{WCDMA} ¹⁾			
@f _{carrier}	2112.4	...	2152.6	MHz		1.8	2.5	dB
@f _{carrier}	2112.4	...	2152.6	MHz		1.8	2.4 ²⁾	dB
Amplitude ripple (p-p)					Δα _{WCDMA} ¹⁾			
@f _{carrier}	2112.4	...	2152.6	MHz		0.4	1.0	dB
Error Vector Magnitude					EVM ³⁾			
	2112.4	...	2152.6	MHz		1.0	3.0	%
Input VSWR (ANT port)								
	2110.0	...	2155.0	MHz		1.65	2.0	
Output VSWR (RX port)								
	2110.0	...	2155.0	MHz		1.4	2.0	
Attenuation					α			
	0.3	...	1310.0	MHz	30	42		dB
	1310.0	...	1355.0	MHz	38	42		dB
@f _{carrier}	1712.4	...	1752.6	MHz	46	51		dB
	1910.0	...	1955.0	MHz	27	33		dB
	2400.0	...	2500.0	MHz	25	35		dB
	3820.0	...	3910.0	MHz	19	39		dB
	4220.0	...	4370.0	MHz	20	32		dB
	5530.0	...	5665.0	MHz	20	27		dB

1) Attenuation of WCDMA signal ("Powertransferfunction"). Please refer to annotation on page (9).
 2) Maximum insertion attenuation at room temperature T= +25 °C.
 3) Error Vector Magnitude (EVM) based on definition given in 3GPP TS 25.141.



SAW Components	B7699
SAW Duplexer	1732.5/2132.5 MHz

Data Sheet



Characteristics for W-CDMA Band 4

Temperature range for specification: T = -15 °C to +80 °C
 Antenna terminating impedance: Z_{ANT} = 50 Ω
 RX terminating impedance: Z_{RX} = 50 Ω
 TX terminating impedance: Z_{TX} = 50 Ω

Characterisitcs TX - RX				min.	typ. @ 25 °C	max.	
Isolation			$\alpha_{\text{WCDMA}}^{1)}$				
@f _{carrier}	1712.4	...	1752.6 MHz	52	56		dB
@f _{carrier}	2112.4	...	2152.6 MHz	45	51		dB

1) Attenuation of WCDMA signal ("Powertransferfunktion"). Please refer to annotation on page (9).



Data Sheet



Characteristics for CDMA 1x AWS Band

Temperature range for specification: T = -30 °C to +85 °C
 Antenna terminating impedance: Z_{ANT} = 50 Ω
 RX terminating impedance: Z_{RX} = 50 Ω
 TX terminating impedance: Z_{TX} = 50 Ω

Characterisitcs TX - ANT		min.	typ. @ 25 °C	max.	
Center frequency	f _C		1732.5		MHz
Maximum insertion attenuation	α				
1710.0 ... 1755.0 MHz			1.6	2.0	dB
1710.0 ... 1755.0 MHz			1.6	1.9 ¹⁾	dB
Amplitude ripple (p-p)	Δα				
1710.0 ... 1755.0 MHz			0.4	1.0	dB
Input VSWR (TX port)					
1710.0 ... 1755.0 MHz			1.9	2.0	
Output VSWR (ANT port)					
1710.0 ... 1755.0 MHz			1.7	2.0	
Attenuation	α				
0.3 ... 1000.0 MHz		30	38		dB
1310.0 ... 1355.0 MHz		30	36		dB
1574.0 ... 1577.0 MHz		38	45		dB
2110.0 ... 2155.0 MHz		43	46		dB
2400.0 ... 2500.0 MHz		25	37		dB
3420.0 ... 3510.0 MHz		20	25		dB
5130.0 ... 5265.0 MHz		7	12		dB

¹⁾ Maximum insertion attenuation at room temperature T= +25 °C



Data Sheet



Characteristics for CDMA 1x AWS Band

Temperature range for specification: T = -30 °C to +85 °C
 Antenna terminating impedance: Z_{ANT} = 50 Ω
 RX terminating impedance: Z_{RX} = 50 Ω
 TX terminating impedance: Z_{TX} = 50 Ω

Characterisitcs ANT - RX		min.	typ. @ 25 °C	max.	
Center frequency	f _C		2132.5		MHz
Maximum insertion attenuation	α				
2110.0 ... 2155.0 MHz			1.8	2.6	dB
2110.0 ... 2155.0 MHz			1.8	2.5 ¹⁾	dB
Amplitude ripple (p-p)	Δα				
2110.0 ... 2155.0 MHz			0.4	1.0	dB
Input VSWR (ANT port)					
2110.0 ... 2155.0 MHz			1.65	2.0	
Output VSWR (RX port)					
2110.0 ... 2155.0 MHz			1.4	2.0	
Attenuation	α				
0.3 ... 1310.0 MHz		30	42		dB
1310.0 ... 1355.0 MHz		38	42		dB
1710.0 ... 1755.0 MHz		46	51		dB
1910.0 ... 1955.0 MHz		27	33		dB
2400.0 ... 2500.0 MHz		25	35		dB
3820.0 ... 3910.0 MHz		19	39		dB
4220.0 ... 4370.0 MHz		20	32		dB
5530.0 ... 5665.0 MHz		20	27		dB

1) Maximum insertion attenuation at room temperature T= +25 °C



SAW Components **B7699**

SAW Duplexer **1732.5/2132.5 MHz**

Data Sheet



Characteristics for CDMA 1x AWS Band

Temperature range for specification: $T = -30\text{ °C to }+85\text{ °C}$
 Antenna terminating impedance: $Z_{ANT} = 50\ \Omega$
 RX terminating impedance: $Z_{RX} = 50\ \Omega$
 TX terminating impedance: $Z_{TX} = 50\ \Omega$

Characterisitcs TX - RX				min.	typ. @ 25 °C	max.	
Isolation	1710.0 ... 1755.0	MHz	α	52	56		dB
	2110.0 ... 2155.0	MHz		45	51		dB



SAW Components

B7699

SAW Duplexer

1732.5/2132.5 MHz

Data Sheet



Maximum ratings

Storage temperature range	T _{stg}	-40/+85	°C	
DC voltage	V _{DC}	5	V	
ESD voltage	V _{ESD}	50 ¹⁾	V	machine model, 10 pulses source and load impedance 50 Ω } continuous wave T = 55° C, 5000 h
Input power at 1710.0 ... 1755.0 MHz	P _{IN}	29	dBm	
elsewhere		10	dBm	

¹⁾ acc. to JESD22-A115A (machine model), 10 negative & 10 positive pulses.

Annotation for characteristics section

Attenuation of WCDMA signal ("Powertransferfunction", α_{WCDMA}) is determined by


$$\int_{-\infty}^{\infty} |S_{ds21}(f)H_{RRC}(f - f_{Carrier})|^2 df$$

f_{Carrier} according to 3GPP TS 25.101 (e.g. for UMTS-Passband, f_{Carrier} ranges from 2112.4 MHz (lowest Rx channel) to 2167.6 MHz (highest Rx channel)). H_{RRC}(f) is the transfer function of the root-raised cosine transmit pulse shaping filter according to 3GPP TS 25.101 with the following normalization:


$$\int_{-\infty}^{\infty} |H_{RRC}(f)|^2 df = 1$$



Frequency Response TX-ANT (Power Transfer Function)

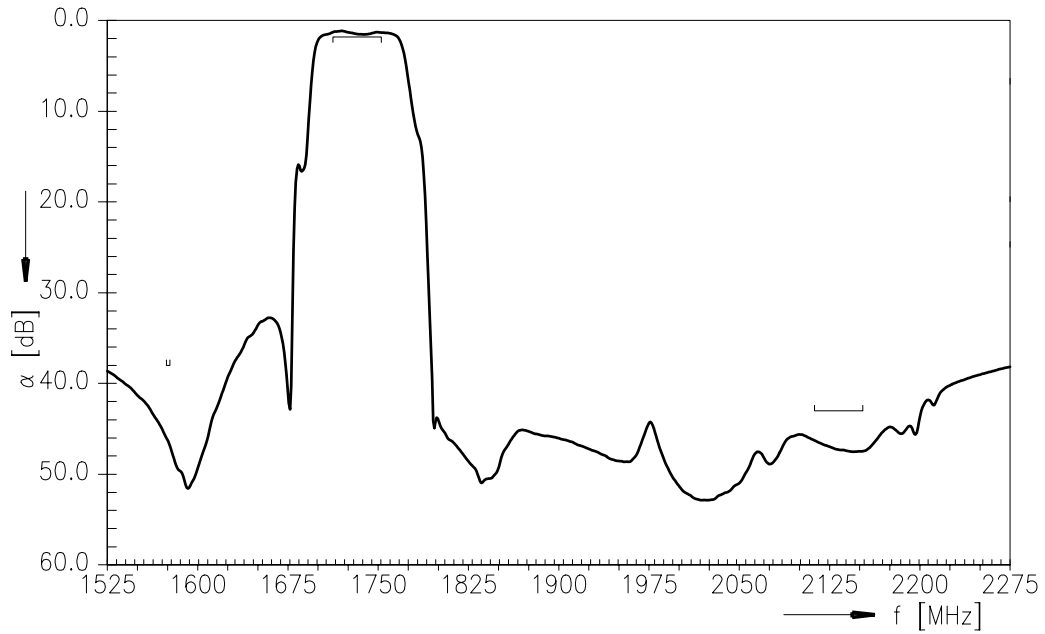


Frequency Response TX-ANT (wideband)

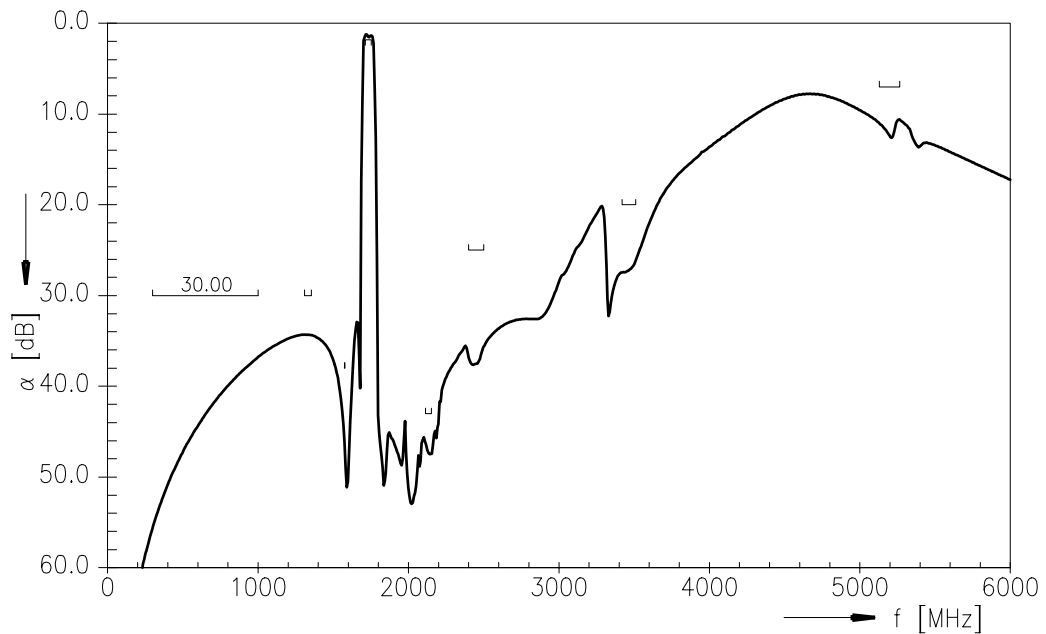




Frequency Response RX-ANT (Power Transfer Function)

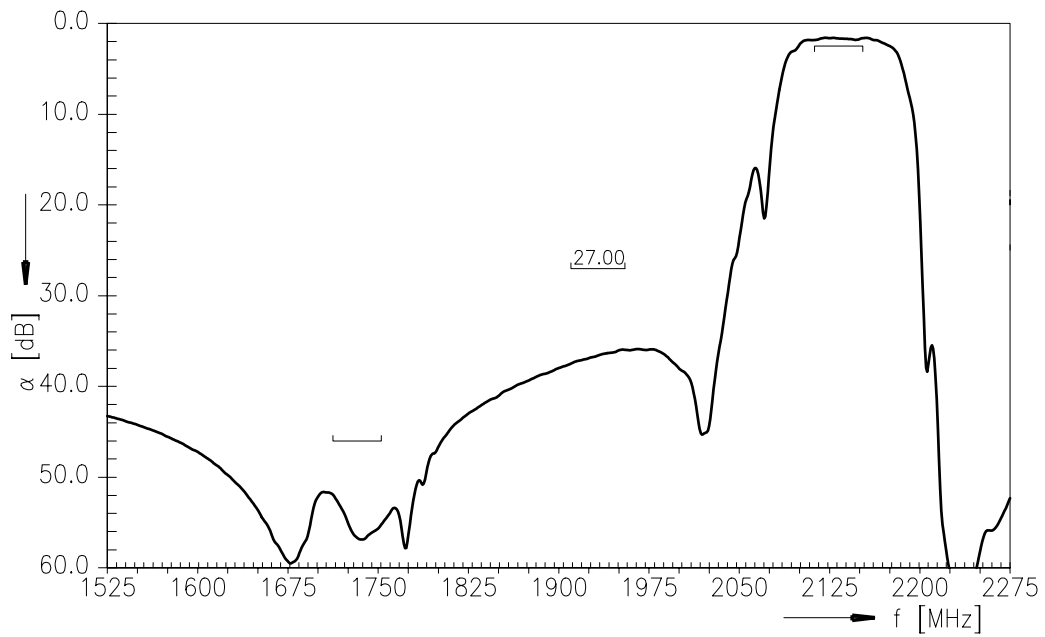


Frequency Response RX-ANT (wideband)

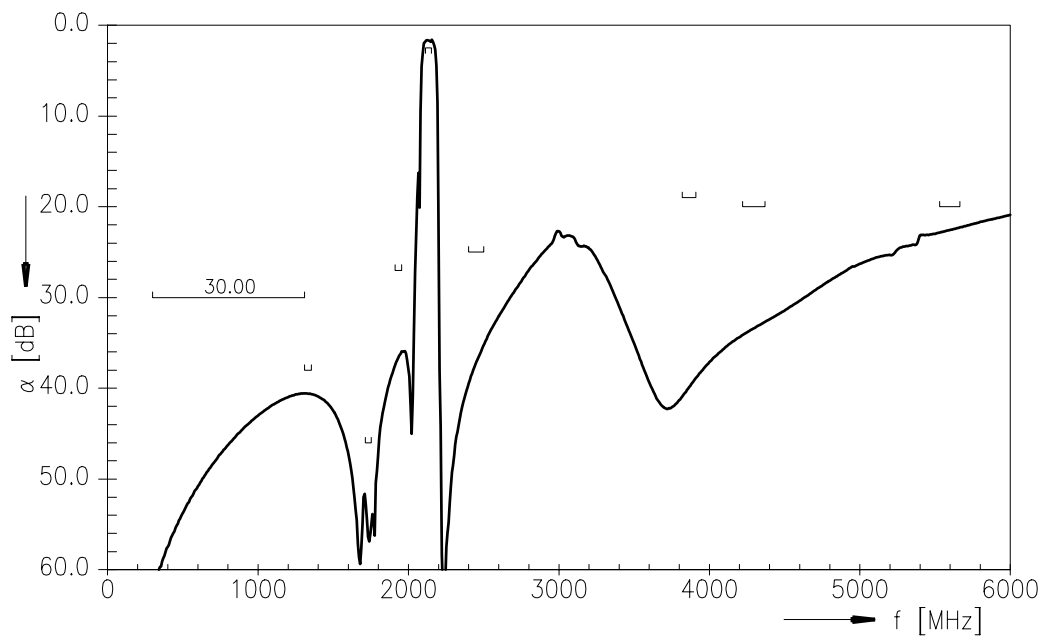




Frequency Response TX-RX (Power Transfer Function)

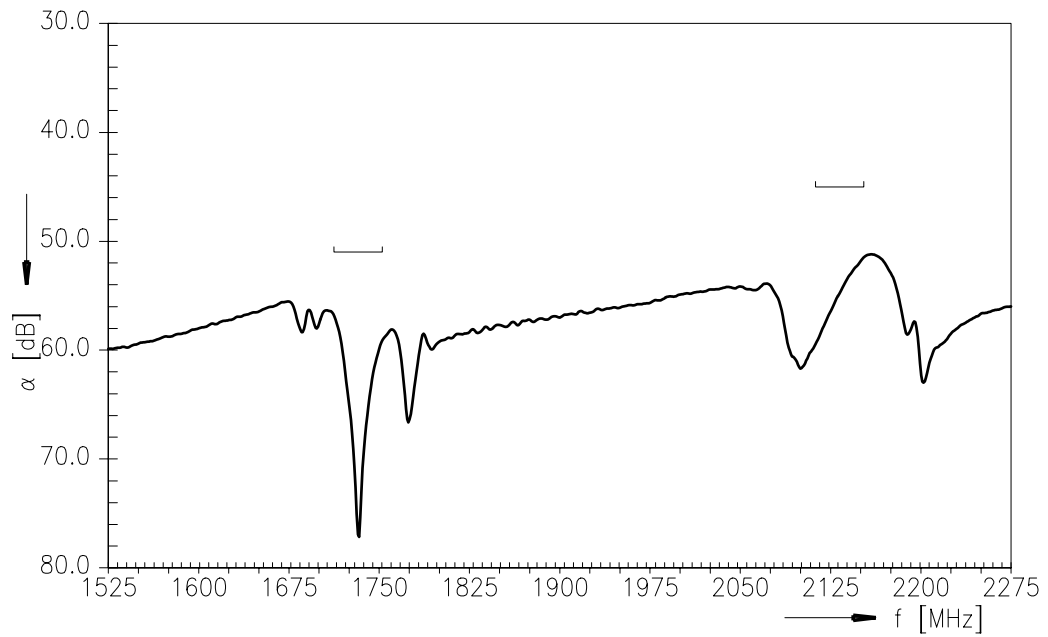

Frequency Response TX-RX (wideband)

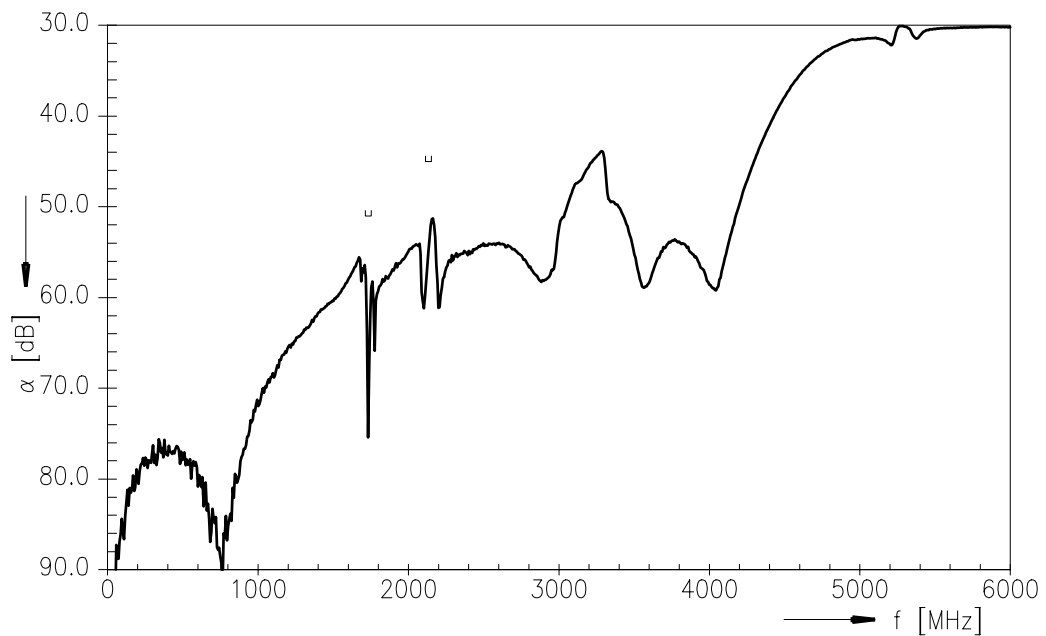

**SAW Components****B7699****SAW Duplexer****1732.5/2132.5 MHz**

Data Sheet

**References**

Type	B7699
Ordering code	B39212B7699P810
Marking and package	C61157-A3-A67
Packaging	F61074-V8153-Z000
Date codes	L_1126
S-parameters	B7699_NB.s3p B7699_WB.s3p See file header for pin/port assignments
Soldering profile	S_6001
RoHS compatible	defined as compatible with the following documents: "DIRECTIVE 2002/95/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 27 January 2003 on the restriction of the use of certain hazardous substances in electrical and electronic equipment. 2005/618/EC from April 18th, 2005, amending Directive 2002/95/EC of the European Parliament and of the Council for the purposes of establishing the maximum concentration values for certain hazardous substances in electrical and electronic equipment."
Moldability	Before using in overmolding environment, please contact your EPCOS sales office.

For further information please contact your local EPCOS sales office or visit our webpage at www.epcos.com .

**Published by EPCOS AG
Surface Acoustic Wave Components Division
P.O. Box 80 17 09, 81617 Munich, GERMANY**

© EPCOS AG 2010. This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.

Please read *cautions and warnings and important notes* at the end of this document.



Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous)**. Useful information on this will be found in our Material Data Sheets on the Internet (www.epcos.com/material). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.
6. Unless otherwise agreed in individual contracts, **all orders are subject to the current version of the "General Terms of Delivery for Products and Services in the Electrical Industry" published by the German Electrical and Electronics Industry Association (ZVEI)**.
7. The trade names EPCOS, BAOKE, Alu-X, CeraDiode, CSMP, CSSP, CTVS, DeltaCap, DigiSiMic, DSSP, MiniBlue, MiniCell, MKK, MLSC, MotorCap, PCC, PhaseCap, PhaseCube, PhaseMod, PhiCap, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SiMic, SIMID, SineFormer, SIOV, SIP5D, SIP5K, ThermoFuse, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at www.epcos.com/trademarks.